
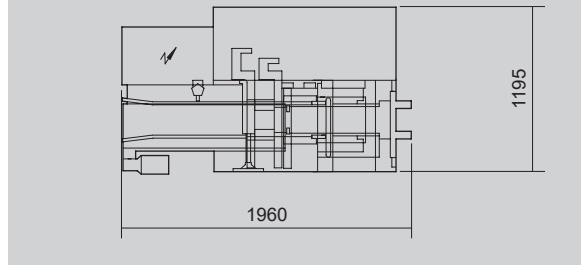
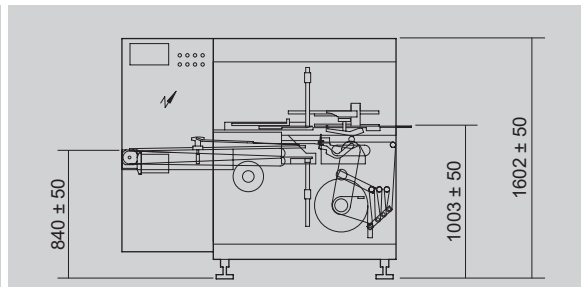
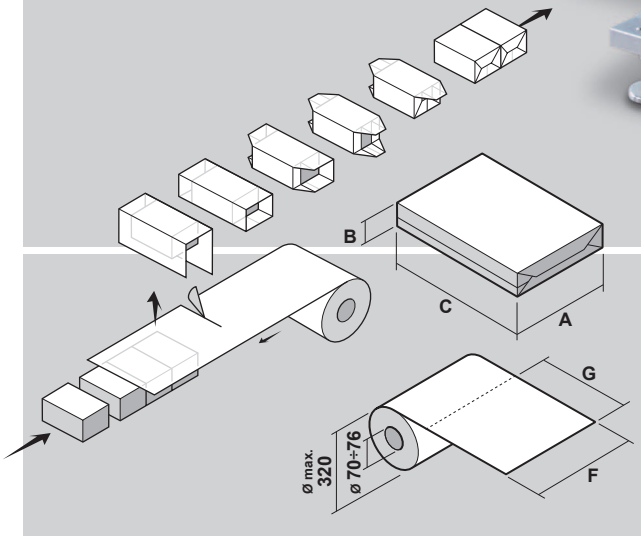


This publication supersedes and replaces any previous edition and revision. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without permission of Tecnicam s.r.l. (Bologna - Italy). The technical data, the images and the diagrams are exclusively indicative and not binding, they might be modified without notice.

AP


Intermittent motion overwrapper with plate or belt sealing

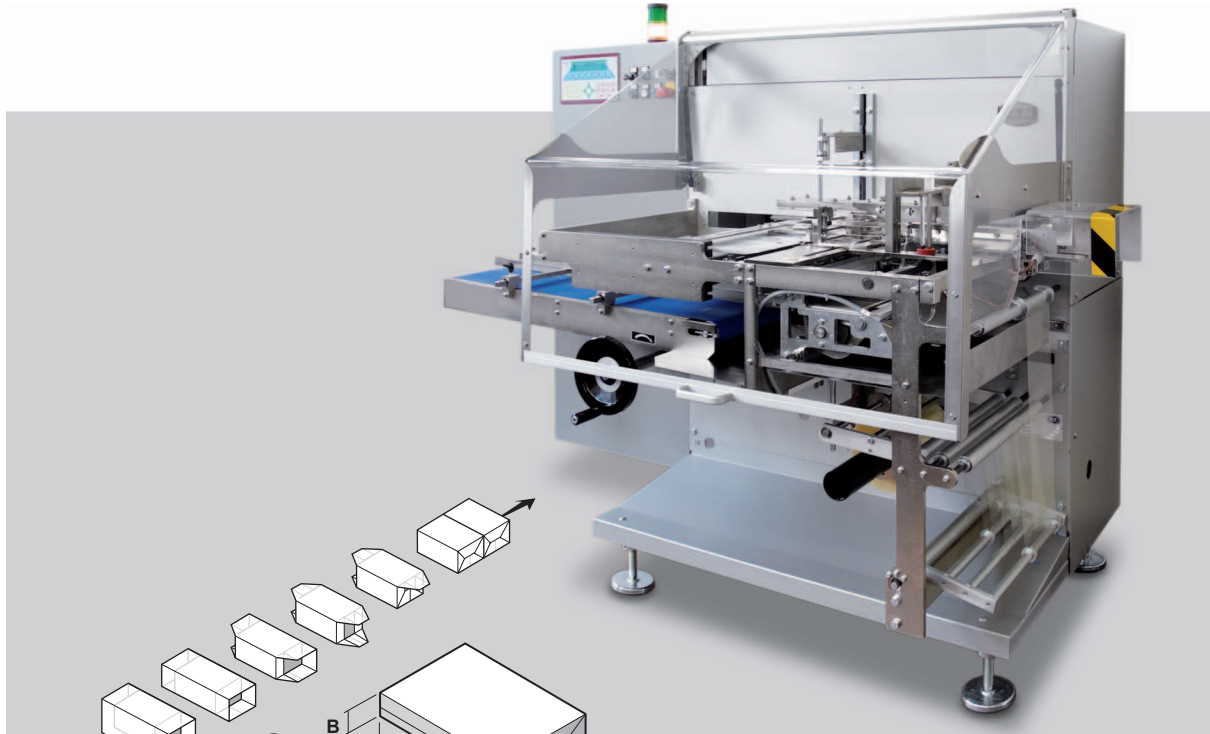

TECHNICAL DATA

Mechanical speed	STROKES/1'	28+70
Motors	KW	0.73
Power absorption (max.)	KW	3.33
Air consumption	NI/1'	300
Air pressure	bar	5+6
Gross weight	kg	~1350
Net weight	kg	~1150

Size range	min.	max.
A	35	150
B	15	80
C	60	300
F	100	400
G	150	450

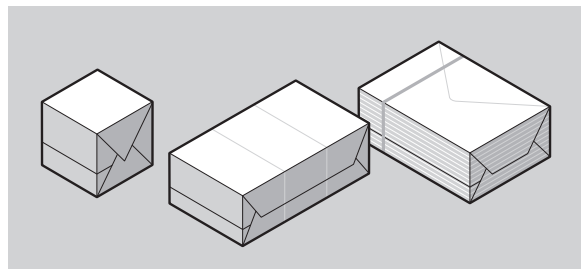

FM-AP-04-uk (10/02/2018)